



iFace-APro



Palm Vein
Face Recognition
Fingerprint
Card Access
Password



Touch Screen

**HIGH SECURITY TIME ATTENDANCE
& ACCESS CONTROL**

New model iFace-APro is popular in the market with smart design, with 4.3 inches TFT Touch screen, improved function that support WIFI, accesscontrol, bell and RFID. Professional communication port with wiegand in & out, 2 × relay, NC, NO, alarm, etc. Device with silicon keypad and ring bell. Data managed via TCP/IP, WiFi, and USB host port for data upload/download to avoid the risk of accidental deletion. What's more, friendly T&A software Taurus with perfect setting of time zone, tamper alert, anti pass, etc.

- World-class algorithm, high-speed and accurately identify face.
- Palm Vein/Face/Fingerprint/Pin/Card authentication.
- Suitable for the entrances and exits of office, factory, hotel, school, etc.
- Capacity: Palm up to 2,000, user up to 5,000 & logs up to 200,000.
- 4.3 inches Touch screen.
- TCP/IP + USB Flash Drive Download + USB Communication.
- More helpful function like T9 input method, self-service inquiry, etc.
- Support door control & alarm function.
- USB flash drive for offline data management.
- Multi-language: English, Arabic, French, Spanish, Portuguese, etc.
- Multiple shifts setting.
- Professional T&A software Taurus.
- Easy wall-mounting.
- Exact calculation of worked hours / overtime.

Technical Specification

Model	iFace - APro
Biometric measurement	Palm Vein, Face & Fingerprint
Palm vein capacity	2,000
Face capacity	5,000
Fingerprint capacity	10,000
Log capacity	200,000
CPU	1GHz
LCD display	4.3" capacitive touch screen 272 x 480 pixel
Interface	TCP/IP, USB (host and slave), 2 × Relay, wiegand in & out
Language	English, Arabic, French, Korean, Spanish, Portuguese, etc
Attendance mode	Palm or Face or Fingerprint or Password or Card or Palm+Fingerprint or Palm+Face or Face+Fingerprint or Palm+Face+Fingerprint or Palm+Face+Fingerprint+Card
Voice instruction	16-bit Hi-Fi voice & sound indication
Verification time	< 0.5 second [1:N]
FRR (False Rejection Rate)	< 1%
FAR (False Acceptance Rate)	< 0.0001%
Power source	12VDC/2A
Operating temperature	0 - 45 Degree Celsius
Operating humidity	<90%RH
Dimensions (mm)	210 x 88.4 x 53.75
Weight (kg)	0.33
Quantity/Carton	10 units
Gross weight/Carton (kg)	8.5

Palm, Face & Fingerprint Time Attendance

Brand: Felix
Model: iFace-APro
Software: eTime T&A



Optional Function - RF Card:13.56MHZ Mifare



4.3 Inches Touch Screen




Palm, Face & Fingerprint Sensor



Interface

Application

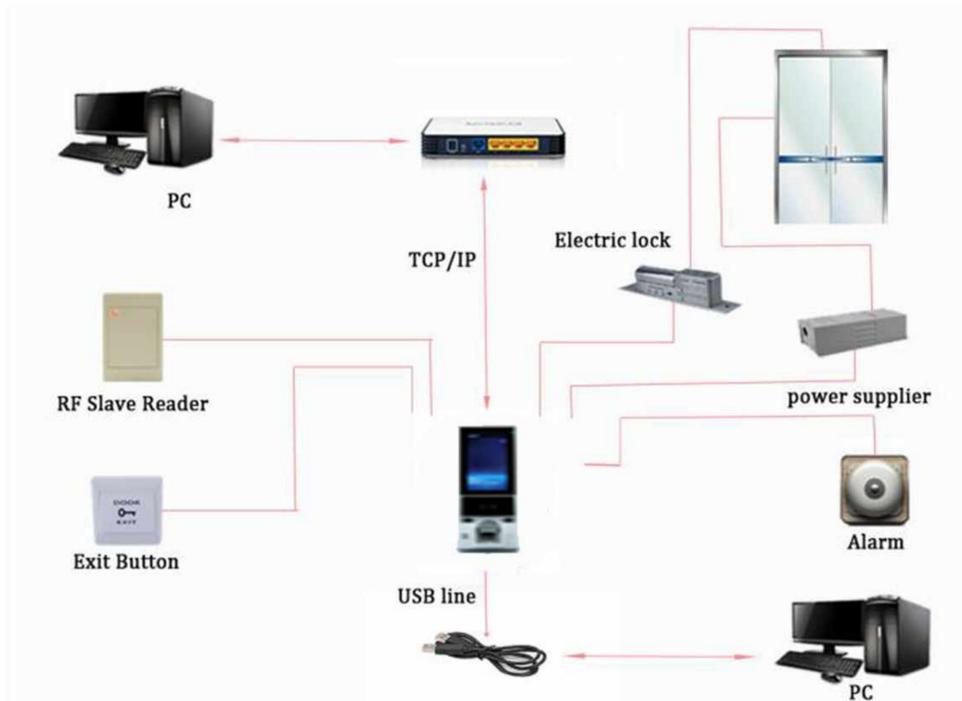

Accessories



Interface

