

F-D603

MORTISE MOUNTED DOOR HOLDER




Product Features

- Emergency release button/test button.
- Dual voltage selectable (12VDC or 24VDC).
- Wall mounting direction.
- Reliable Fail-safe mechanism.
- Durable and silence operation.
- Low current consumption.

Technical Specifications

Model	F-D603
Holding Force	50kg (110lbs)
Voltage	12/24 VDC
Suitable Humidity	0~95%
Surface Temp	≤+20°C
Operating Temp	-10°C+55°C (14-131F)
Suitable for	All Kinds of Single/ Double Smokeproof Doors
Finishes for Shell	High temperature paint environmental protection zinc
Finishes for Armature	Chromium
Faceplate Material	Stainless Steel
Size	88Lx88Wx29H (mm)
Weight	1kg

Installation

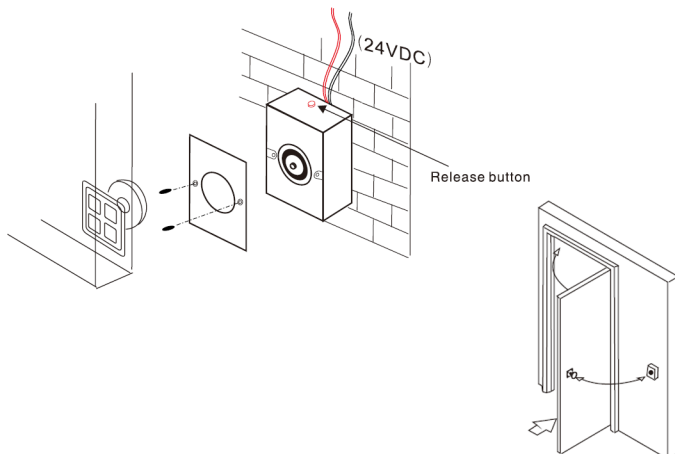

1. The default setting is 24VDC.
2. Red wire is +, black wire is -.
3. Release the red button by hand in emergency.

Dimension

