


F-12060-12-4CH

DIN RAIL POWER SUPPLY

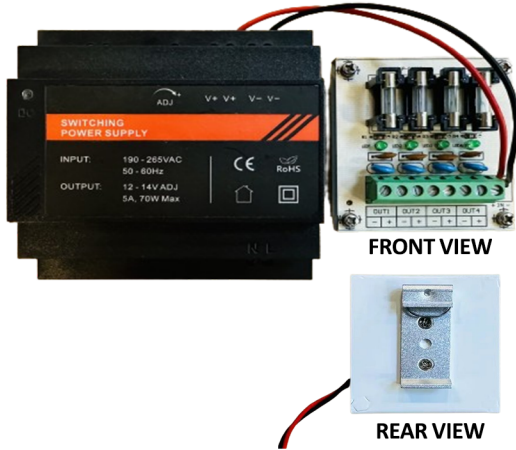

Product Features

- Maximum Output Power: 70W.
- High efficiency, long life and high reliability.
- Protection: Input fuse/overload/over voltage/ short circuit.
- Multifunction LED indicators.
- 100% full load burn-it test.
- 4 Channel fused output.
- Din Rail Mounting.

Description

F-12060-12-4CH is a din rail power supply module with 4 Fused output channels, DC output 12-14V/5A with Fuse, maximum output power 70W.

Technical Specifications

Model		F-12060-12-4CH
INPUT	Voltage Range	190 - 265VAC
	Frequency Range	50 - 60Hz
OUTPUT	Voltage (AC Mode)	12-14V ±2% (Adjustable)
	Rated Current	5A
	Rated Power (Max.)	70W
	Efficiency (Typ.)	>86%
	Ripple & Noise	<120mVp-p
	Output Channel	4 Channels Fused
PROTECTION	Input	2A/ 250VAC
	Overload	6A ±5%
	Over Voltage	Hiccup mode, recovers automatically after fault condition is removed.
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed
ENVIRONMENT	Temperature	Working: -20°C~45°C, Storage: -30°C~80°C
	Humidity	Working: 20-80%RH, Storage: 10-90%RH
LED INDICATOR	Green	ON - DC ok
BOX	Dimension	89mmx93mmx56mm